

HEAT TREATMENT REGIME OF THE INITIAL ALUMINUM HYDROXIDE TO FORM MODIFICATIONS OF Γ AND α - Al_2O_3

Safarova Ruxshona Ulug'bek qizi

*Student II course, group 7 FLL – 23
Bukhara State Pedagogical Institute,
The Republic of Uzbekistan.*

Bekov Ulug'bek Safarovich

*Assistant, “Technology of building materials and structures”
Bukhara Engineering and Technology Institute,
The Republic of Uzbekistan.*

Abstract: To obtain high-quality ceramics, it is necessary to grind the raw material and obtain a fine-dispersed structure. This problem was solved by converting aluminum waste and its alloys into nanostructured aluminum hydroxide, which allows obtaining ceramics with high properties. The heat treatment regime of the original aluminum hydroxide in air (1350°C , 1 hour) was developed to convert it into aluminum oxide (γ and α - modifications), ensuring the preservation of high activity of the aluminum oxide powder for heating and bonding.

Key words: ceramics, fine-dispersed structure, aluminum, nanostructure, aluminum hydroxide, aluminum oxide, hydrogen generator, precursor, powder, heat treatment, γ - Al_2O_3 , temperature, α - Al_2O_3 , isothermal, furnace, modification.


In the world of modern materials, ceramics play an important role due to a wide range of their properties. Interest in structural ceramics has grown so much that we can speak of research in this area as the most important direction of modern materials science.

To obtain high-quality ceramics, it is necessary to grind the raw materials and obtain a finely dispersed structure. This is a labor-intensive and energy-intensive

process. This problem was solved by converting aluminum waste and its alloys into nanostructured aluminum hydroxide, which allows obtaining ceramics with high properties.

The selected technological scheme for the production of aluminum oxide material (Figure 1) used $\text{Al}(\text{OH})_3$, a waste product of the hydrogen generator operating cycle, as a precursor. The technological stages and equipment used are standard and widely used in industry.

It is worth noting that an important advantage of the presented technology (compared to similar powders with nano-sized particles used as raw materials) is a much higher productivity of aluminum hydroxide powder production. Heat treatment of the original $\text{Al}(\text{OH})_3$ powder in air (operation 1) is a mandatory technological operation in this process. Its purpose is to dehydrate aluminum hydroxide and convert it into γ and α - Al_2O_3 modifications (these are the two main modifications of corundum).

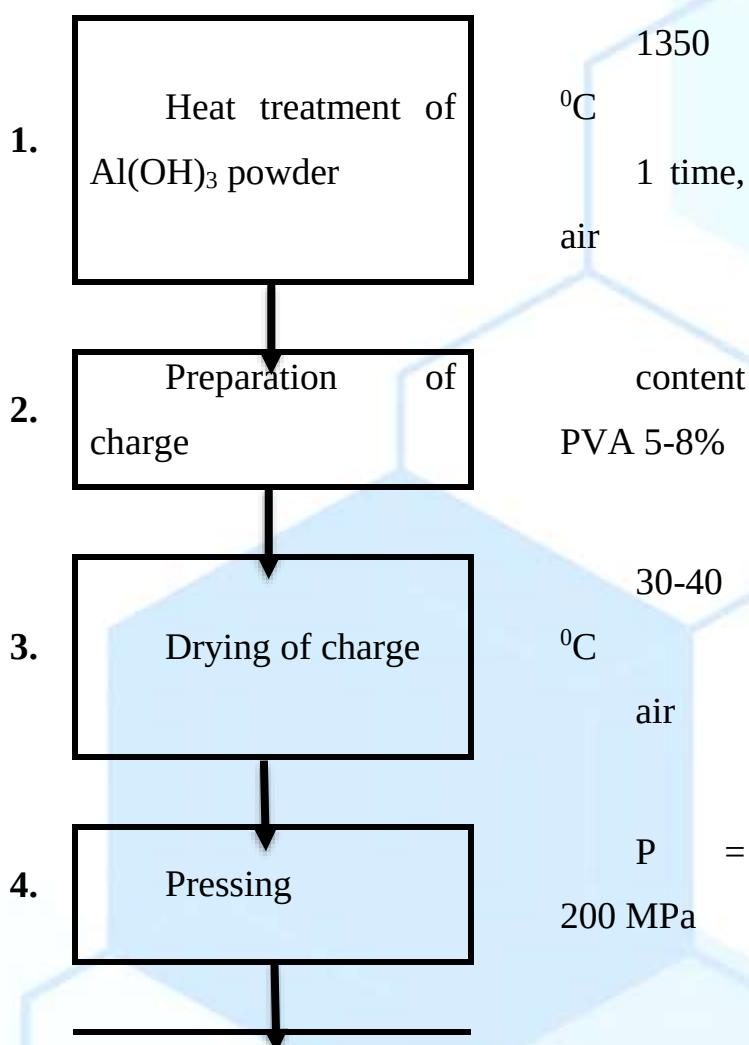

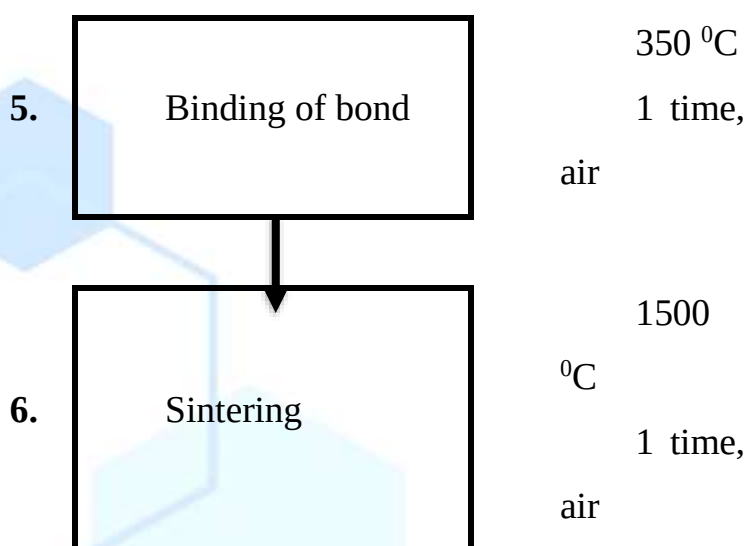


Figure 1. Type and sequence of technological operations for the production of aluminum oxide ceramics from $\text{Al}(\text{OH})_3$.

It is known from experimental practice that the transition of aluminum hydroxide to $\gamma\text{-Al}_2\text{O}_3$ occurs in the temperature range of 290 - 550 °C, and the transition of $\gamma\text{-Al}_2\text{O}_3$ to the high-temperature $\alpha\text{-Al}_2\text{O}_3$ modification occurs at temperatures above - 1200 °C. As a rule, after heating $\text{Al}(\text{OH})_3$ with a certain isothermal effect in the temperature range of 1200 - 1350 °C, a mixture of γ and α - Al_2O_3 modifications is formed.

The importance of such heat treatment is associated with the need to partially or completely carry out the shrinkage processes in the bulk of the powder (the volume reduction of Al_2O_3 during the $\gamma \rightarrow \alpha$ transition is 14.3%). If the volume reduction of the powder does not occur sufficiently, the hot-bonding obtained as a result of this pressing can lead to the destruction or deformation of the product. In this case, due to even slight unevenness of the compact volume reduction, local areas of the hot-bonded material can tear, breaking its continuity.

It is impractical to use a heat treatment regime in which the $\gamma \rightarrow \alpha$ transition in the initial powder is completely completed. This is because the thermal bonding activity of the powder then decreases sharply, resulting in a low strength of the thermally bonded product. It is clear that in order to obtain satisfactory indicators of the mechanical properties of the material, it is necessary to try to maintain the optimal

activity of the powder, complete the $\gamma \rightarrow \alpha$ transition in the product during thermal bonding and final baking.

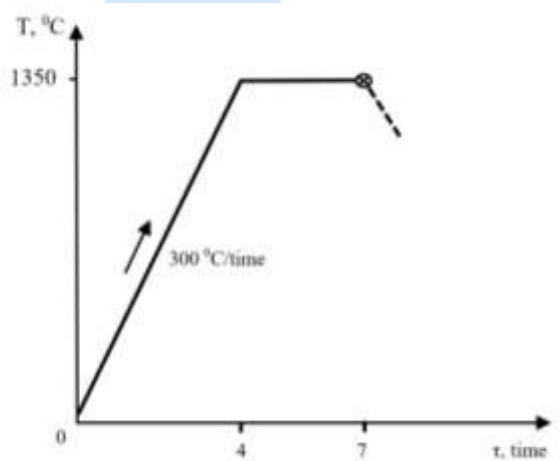


Figure 2. Heat treatment regime for aluminum hydroxide powder: T - temperature, t - time, - furnace shutdown.

Thus, in this part of the work, it was necessary to choose a heat treatment regime for $\text{Al}(\text{OH})_3$ powder that would provide a sufficient reduction in its volume and provide optimal thermal bonding activity. Finding such a compromise is possible only experimentally. At this stage of the study, the technological regime (Fig. 2) of 1350 °C and an isothermal holding time of 1 hour were selected.

The process of mixing the powder with the binder was carried out in a SAND - 3 mixer. The resulting wet mixture was placed on a stainless steel tray and dried in a SNOL - 3.5 drying oven at a temperature of 30-40 °C. Samples (diameter 20 mm and height 5 mm) were pressed in a steel mold under a pressure of 200 MPa.

1. Based on preliminary experiments, the possibility of obtaining aluminum oxide material (using conventional ceramic technology operations) from aluminum hydroxide, which is a waste product of the hydrogen generator operating cycle, was demonstrated.

2. The heat treatment regime of the original aluminum hydroxide in air (1350 °C, 1 hour) was designed to convert it into aluminum oxide (γ and α - modifications), ensuring the preservation of the high activity of the aluminum oxide powder for heat bonding.

Literature

1. Bekov U. et al. Influence of the nature of solvents on the spectroscopic properties of some vanadyl complexes //BIO Web of Conferences. – EDP Sciences, 2024. – Т. 105. – С. 02006.
2. Raximov F. F., Bekov U. S. Sintez qilingan kremniyorganik birikmalarning infraqizil spektroskopik tahlili //Фан ва технологиялар тараққиёти илмий–техникавий журналнал. – 2021. – Т. 3. – С. 48-52.
3. Беков У. С. О внедрении безотходных технологий в кожевенно-меховой промышленности //Universum: технические науки. – 2020. – №. 6-3 (75). – С. 9-11.
4. Беков У., Қодиров Ж. Гидрофобные свойства пластицированного гипса полученоно с использованием органического полимера на основе фенолформальгида //Естественные науки в современном мире: теоретические и практические исследования. – 2022. – Т. 1. – №. 25. – С. 23-26. <https://doi.org/10.5281/zenodo.7344600>
5. Беков У. С. Флуоресцентные реакции ниобия и тантала с органическими реагентами //Universum: химия и биология. – 2020. – №. 5 (71). – С. 47-49. URL: <http://7universum.com/ru/nature/archive/item/9350>
6. Беков, У. С. Влияние способов переработки и внешних факторов на свойства дисперсно-наполненных полимеров / У. С. Беков // Современные материалы, техника и технология : Материалы 3-й Международной научно-практической конференции, Курск, 27 декабря 2013 года / Ответственный редактор Горохов А.А.. – Курск: Закрытое акционерное общество "Университетская книга", 2013. – С. 88-90. – EDN SBFUXR.
7. Беков, У. С. Изучение технологических и физико - механических свойств полимерных композиционных материалов, полученных на основе полиолефинов и отходов нефтегазовой промышленности / У. С. Беков // Инновации в строительстве глазами молодых специалистов : Сборник научных трудов Международной научно-технической конференции, Курск, 05–06 декабря 2014 года / Ответственный редактор: Гладышкин А.О.. – Курск: Закрытое

акционерное общество "Университетская книга", 2014. – С. 62-65. – EDN TGAMSJ.

8. Safarovich B. U. et al. Using sunlight to improve concrete quality //Science and pedagogy in the modern world: problems and solutions. – 2023. – т. 1. – №. 1.

<http://woconferences.com/index.php/SPMWPS/article/view/155>

9. Фатоев И. И., Беков У. С. Физико-химическая стойкость и механические свойства композитов с реакционноспособными наполнителями в жидких агрессивных средах //Теоретические знания–в практические дела [Текст]: Сборник научных статей. – С. 111.

10. Беков У. С. Хайдарович ҚЖ Физико-механическая характеристика уплотнителей, полученных в результате переработки вторичного бетона и железобетона //Pedagogs jurnalı. – 2023. – Т. 31. – №. 2. – С. 51-56.

11. Safarovich B. U., Khaidarovich K. Z. Type of creep deformations of cellular concrete obtained by a non-autoclave method at low stresses //Horizon: Journal of Humanity and Artificial Intelligence. – 2023. – Т. 2. – №. 4. – С. 81-85. (Safarovich B. U., Khaidarovich K. Z. Type of creep deformations of cellular concrete obtained by a non-autoclave method at low stresses. – 2023.)

<https://univerpubl.com/index.php/horizon/article/view/996>

12. Беков У. С., Хайдарович Қ. Ж. Физико-механические свойства пластицированного гипса полученного на основе фенолформальгида //Principal issues of scientific research and modern education. – 2022. – Т. 1. – №. 8. С. 67-72.

<https://zenodo.org/records/8188392>

<https://woconferences.com/index.php/pisrme/article/view/379>

13. Беков У. С. Исследование относительных деформаций неавтоклавногo ячеистого бетона в условиях чистого сдвига //Tadqiqotlar. – 2023. – Т. 14. – №. 1. – С. 137-141. <http://tadqiqotlar.uz/index.php/01/article/view/1191>

14. Беков У. С. и др. Состав и свойства вяжущих ведущих марок //Journal of new century innovations. – 2023. – Т. 31. – №. 2. – С. 67-72.

<http://www.newjournal.org/index.php/new/article/view/7870>

15. Беков У. С., Хайдарович Қ. Ж. Пригибание плит перекрытия из неавтоклавного ячеистого бетона при нагрузке //Образование наука и инновационные идеи в мире. – 2023. – Т. 26. – №. 2. – С. 122-128.
<http://www.newjournal.org/index.php/01/article/view/8381>
16. Obid o'g'li T. M. et al. Yuqori markali bog 'lovchilar asosidagi ko 'pik beton tarkibini ishlab chiqish //Journal of new century innovations. – 2023. – Т. 34. – №. 1. – С. 58-62. <http://www.newjournal.org/index.php/new/article/view/8376>
17. Беков У. С., Хайдарович Қ. Ж. Действие напряжения в средах на долговечность и скорость установившейся ползучести полиметилметакрилата //Research journal of trauma and disability studies. – 2023. – Т. 2. – №. 8. – С. 1-6.
<http://journals.academiczone.net/index.php/rjtds/article/view/1195>
18. Беков У. С., Хайдарович Қ. Ж. Долговечность и скорость установившейся ползучести выдержанных в жидких средах образцов полиметилметакрилата при изгибе //Research Journal of Trauma and Disability Studies. – 2023. – Т. 2. – №. 8. – С. 7-11. <http://journals.academiczone.net/index.php/rjtds/article/view/1196>
19. Khudoyorovich A. E., Safarovich B. U. Study of the Dependence of Reaction Sensitivity on the Chemistry of Complex Formation //Czech Journal of Multidisciplinary Innovations. – 2022. – Т. 4. – С. 52-54.
20. Obid o'g'li T. M. et al. YUMB asosida olingan ko 'pik betonning fizikaviy-mexanikaviy xossalari //Samarali ta'lim va barqaror innovatsiyalar. – 2023. – Т. 1. – №. 4. – С. 47-54. <https://innovativepublication.uz/index.php/jelsi/article/view/125>
21. У.С.Беков, Ф.Ф.Рахимов, А.М.Рахимов, Ж.Х.Қодиров, Ф.З. Хужакулов Спектральный анализ фенольформальдегидтриэтоксилана //«Курилишда инновациялар, биолар ва иншоотларнинг сейсмик хавфсизлиги» Халқаро миқёсидаги илмий ва илмий-техник конференция Наманган 14 декабрь, 2023 йил. С. 611-615.
22. У.С.Беков, Ф.Ф.Рахимов, А.М.Рахимов, Ж.Х.Қодиров, И.Д.Жораев. Механические свойства пластифицированного гипса на основе кремнийорганического олигомера/«Курилишда инновациялар, биолар ва

иншоотларнинг сейсмик хавфсизлиги» Халқаро микёсидаги илмий ва илмий-техник конференция Наманган 14 декабрь, 2023 йил. С. 624-628.

23. Safarovich B. U. et al. Prevention of loss of cement activity during transportation and storage//Web of Discoveries: Journal of Analysis and Inventions. – 2024. – Т. 2. – №. 12. – С. 25-31.

24. Беков, У. С., and А. М. Рахимов. "Механические свойства пластифицированного гипса на основе кремнийорганического олигомера: Механические свойства пластифицированного гипса на основе кремнийорганического олигомера." (2023): 730-734.